


# Toilet




- Your best choice if you are unsure of the original part
- Just look for the UNIVERSAL "FIT-ALL™" on package as shown


## Tank Repair

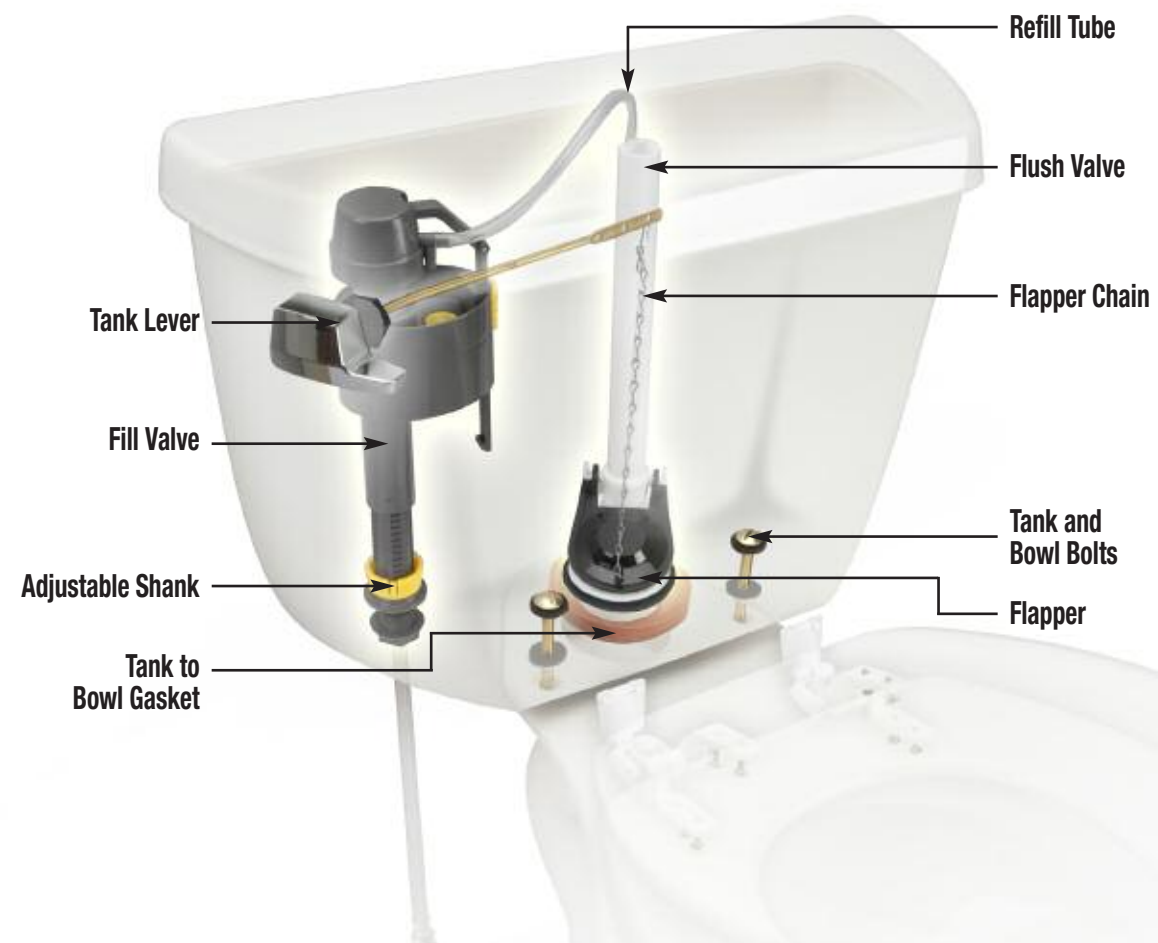

## Bowl Repair

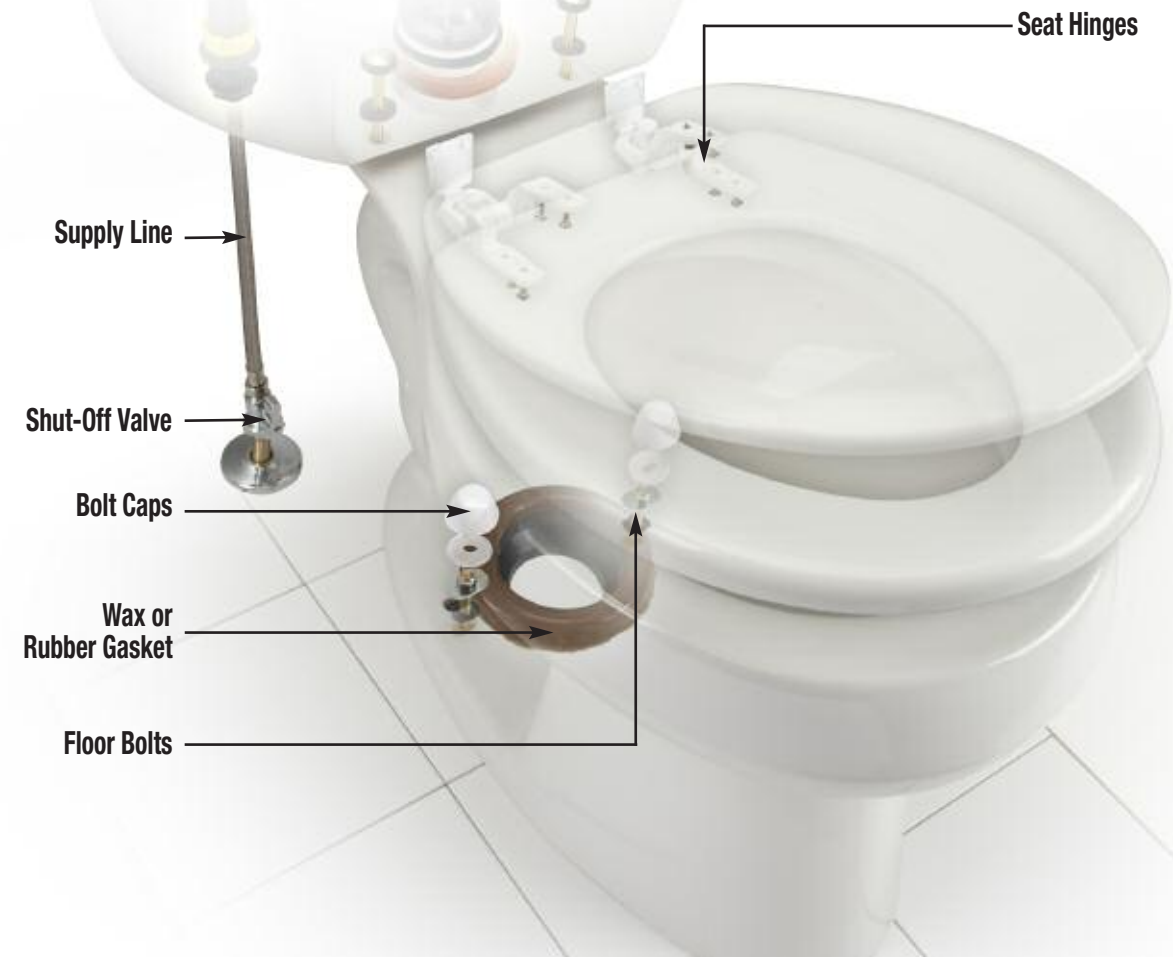

## Fill Valve

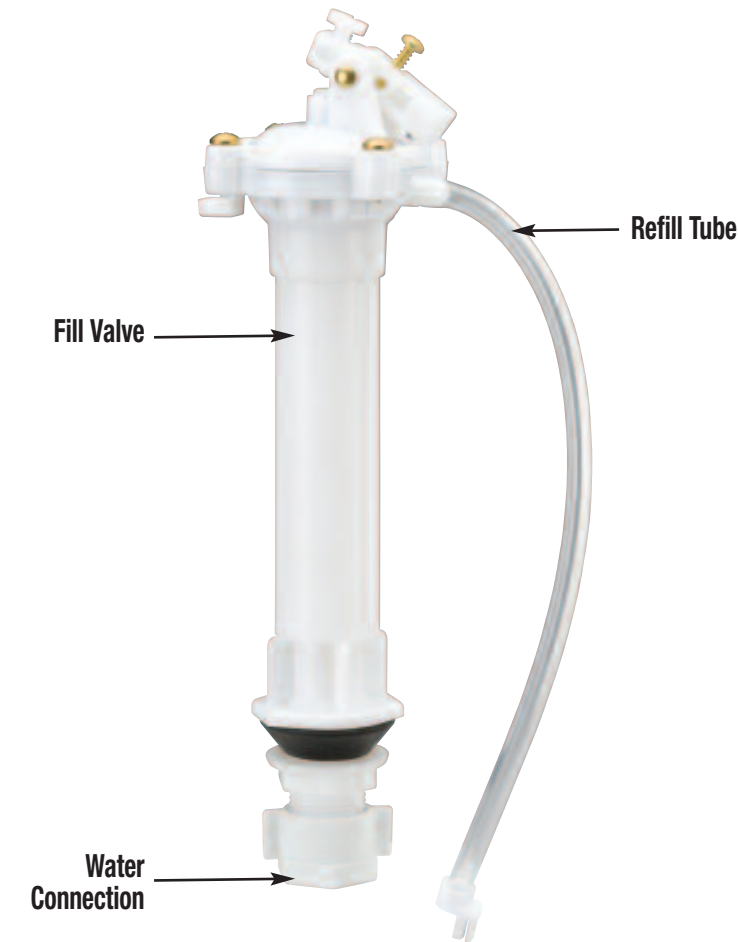

## Flush Valve


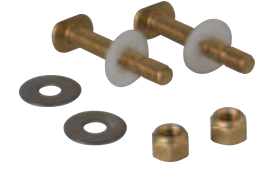
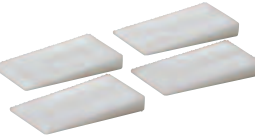










# Toilet



- Your best choice if you are unsure of the original part
- Just look for the UNIVERSAL "FIT-ALL™" on package as shown

Problem	Cause	Solution
 <p>Water leaks between tank and bowl</p>	Worn tank to bowl gasket	 <p>Replace toilet tank to bowl gasket and bolts</p>
 <p>Water leaks between bowl and floor</p>	Worn or damaged wax or sponge seal	 <p>Replace wax or rubber gasket and bolts</p>

Problem	Cause	Solution
 <p>Toilet bowl wobbles</p>	Broken floor bolts or screws	 <p>Replace bolts or screws</p>
	Floor is uneven	 <p>Insert shims between bowl and floor</p>
 <p>Toilet is noisy</p>	Fill valve not working properly	 <p>Replace fill valve</p>

Problem	Cause	Solution
 <p>Water runs frequently or constantly</p>	Worn flapper	 <p>Replace flapper</p>
	Worn seat disc	 <p>Replace fill valve and/or flapper</p>
	Worn tank ball	 <p>Replace tank ball</p>
	Fill valve diaphragm or plunger may be worn	 <p>Replace diaphragm or plunger</p>
	Water level set too high	 <p>Adjust fill valve cap screw until water level is 1" below overflow tube</p>